
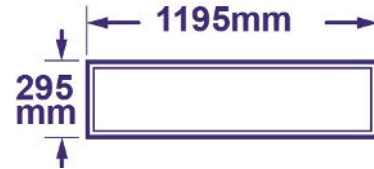


- High quality diffuser for uniform light distribution
- High efficacy, 130lm/W
- Flicker-free
- Lifetime of 50000 hrs
- 4000/5000/6000K CCT Changeable
- 110° beam angle
- Surface mount and suspended installation accessories available
- Includes 1.2m Australian approved cable and plug

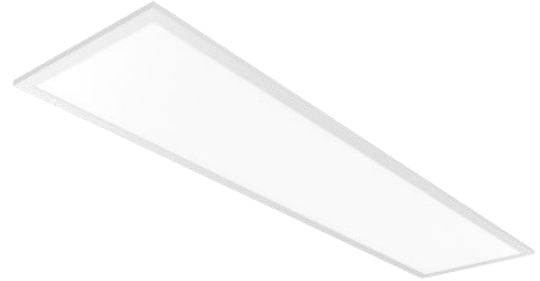

Order Code 66624

General Data

Lamp Base N/A
Design PMMA Light Guide Plate

Geometric Data

Length (mm) 295mm
Width (mm) 1195mm
Height (mm) 32mm
Weight (g) 2030g




Electric Data

Wattage 24W
Voltage 220-240V
Power Factor 0.9
Operating Frequency 50 or 60Hz

Photometric Data

Total Luminous Flux (lm) 3100 lm
CRI 80
CCT 4000/5000/6000K – CCT Changeable
Luminous Intensity (cd) TBC
Beam Angle (°) 110°
Lifetime(L70) 50000 hrs
Operating Temperature -20 to 40°C

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM





Order Code	66624
Product Description	Verbatim Backlit Panel 24W 1195x295 130lm/W ND 1.2m AU C n P

Technical Packaging Details

Giftbox Barcode	4895117966242
Inner Carton Barcode	TBC
Outer Carton Barcode	24895117966246
Pack Dimensions (LxWxH)	1265x383x58mm
Pack Weight	TBC
Carton Qty (Shipping Unit)	4
Carton Dimensions (LxWxH)	1285x255x405mm
Cartons/Layer	TBC
Layers/Pallet	TBC
Units/Pallet	TBC