

teso pro

teso series




the teso pro range takes commercial and retail applications to the next step. the clean lines of a track-recessed driver provides a clean minimalist look. being only 52mm in diameter the teso pro has a low aesthetic impact.

high CRI and a tight colour consistency provides a high quality lighting result to compliment any architectural project plus the pro has an option for a wireless controlled adjustable beam angles.

specifications

system wattage:	21W
luminaire output:	nominal 1100lm delivered
CCT:	2700K, 3000K, 3500K, 4000K
optics:	15°, 25°, 40°, 60°
CRI:	90
control:	non-dim, 1-10V, TRIAC, DALI
operating voltage:	240Vac
finish:	white, black
housing:	die-cast aluminium
diffuser:	PC lens
enclosure protection:	IP20
operating temp:	25°C
lifetime:	50,000hrs
warranty:	5 years
accessories:	honeycomb filter, clear lens, frosted lens, snoot

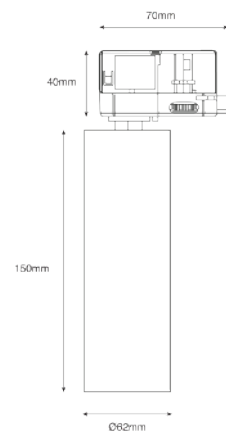

product code

FT	P	21	X	X	X	X	T	X
product group	group designation	wattage	dimmable	beam angle	cct	fixture colour	mounting	accessories
FT teso	P pro	21 21W	D0 non-dim D1 1-10V D2 TRIAC DD DALI CS Casambi	15 15° 25 25° 40 40° 60 60°	27 2700K 30 3000K 35 3500K 40 4000K	B black W white	T track	H honeycomb filter C clear lens F frosted lens S snoot



+61 (03) 9790 8999
lighting@verbatim.com.au
www.verbatimlighting.com.au

