

silver XS


vue series



architectural lighting requires the right luminaire. highlighting and accenting with multiple sources rather than just flooding an area with light. the silver XS has a subtle aperture to minimise visual impact, and with an adjustable specular aluminium reflector and a range of beam angles to create the perfect effect.

specifications

system wattage:	7W
luminaire output:	505lm to 562lm
CCT:	2700K, 3000K, 3500K, 4000K
optics:	20°, 35°, 55°
CRI:	90
control:	non-dim, 1-10V, triac, DALI, Casambi
operating voltage:	240Vac
finish:	white & black
housing:	die-cast aluminium & specular aluminium reflector
diffuser:	glass lens
enclosure protection:	IP20
operating temp:	25°C
lifetime:	50,000hrs
warranty:	5 years
accessories:	honeycomb filter, frosted diffuser

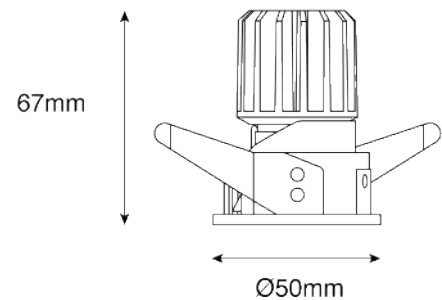

product code

FV	SXS	7	X	X	X	X	R	X
product group	group designation	wattage	dimmable	optics	cct	fixture colour	mounting	accessories
FV vue	SXS silver XS	7 7W	Do non-dim D1 1-10V D2 triac DD DALI CS Casambi	20 20° 35 35° 55 55°	27 2700K 30 3000K 35 3500K 40 4000K	B black W white	R recessed	H honeycomb filter F frosted lens



+61 (03) 9790 8999
 lighting@verbatim.com.au
 www.verbatimlighting.com.au

