

artere axis 16

flexible strip light



the axis 16 bends horizontally and vertically, allowing complex irregular shapes – unlike the previous generation which could only bend on one axis. it's IP67 and can be supplied in any length up to 10m (if fed from both ends), with no pre-defined cutting intervals. it's available in static white colours and tunable white (see axis 23 for RGBW and pixel control options). various mounting options can be selected at time of order, along with a wide variety of dimming and control options.

specifications

system wattage:	14W/m
luminaire output:	840lm/m @ 14W
CCT:	2700K, 3000K, 3500K, 4000K, 5000K, 6000K, TW
optics:	120°
CRI:	80
control:	non-dim, 1-10V, DALI, Casambi
operating voltage:	24Vdc
finish:	white
housing:	silicon
diffuser:	homogeneous diffuser
enclosure protection:	IP67, IK08
operating temp:	-20°C ~ 45°C
lifetime:	50,000hrs (indoor); 36,000hrs (outdoor)
warranty:	5 years (indoor); 3 years (outdoor)
accessories:	bracket, clip, extrusion, flexible



product code

product group	group designation	wattage	dimmable	cct	connector	mounting	length
FA artere	A16 axis 16	14 14W/m	Do non-dim D1 1-10V DD DALI CS Casambi	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 60 6000K TW tunable white	EF end feed RF rear feed SF side feed	B bracket C clip E extrusion F flexible	5 5000mm

note: tunable white requires DALI or Casambi driver



+61 (03) 9790 8999
lighting@verbatim.com.au
www.verbatimlighting.com.au



information is subject to change without prior notice. images are for illustrative purposes only



artere axis 16

flexible strip light





dimensions / diagram



end feed

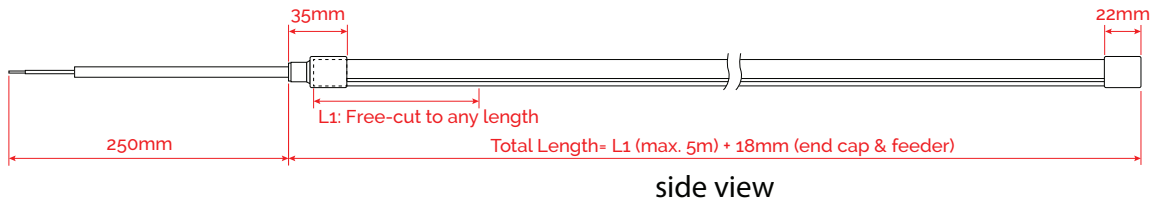

side feed

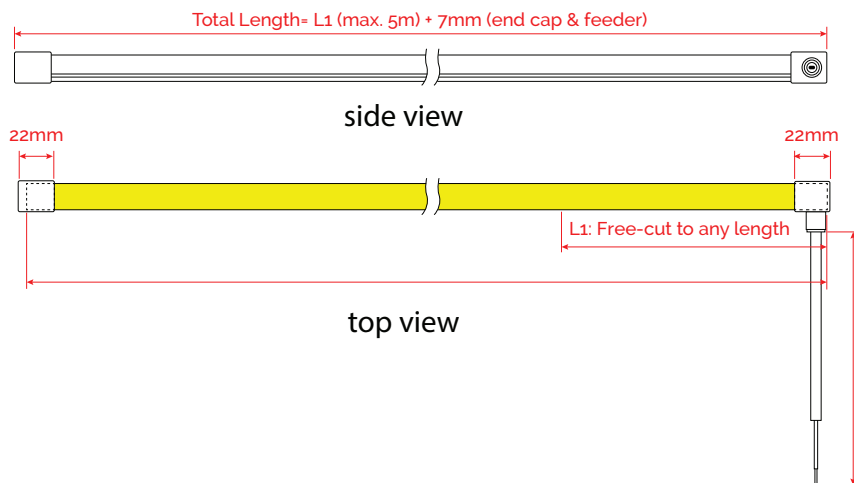

rear feed

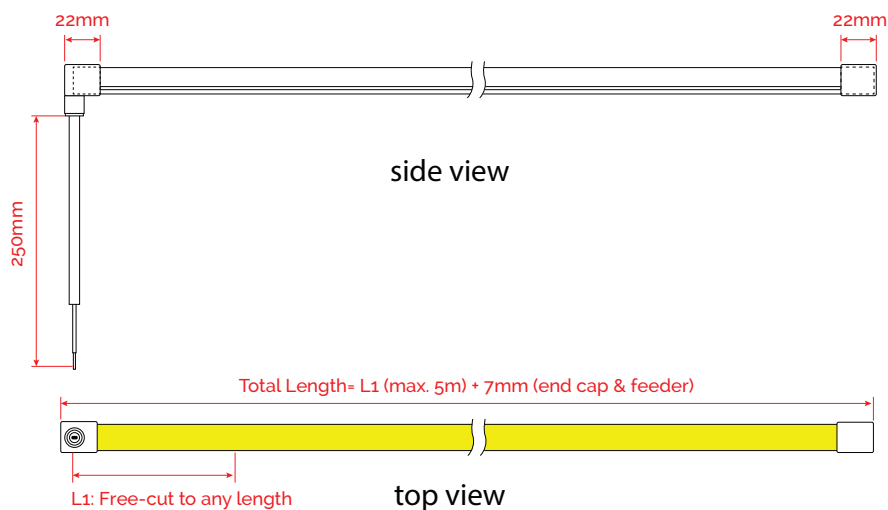

+61 (03) 9790 8999
lighting@verbatim.com.au
www.verbatimlighting.com.au



information is subject to change without prior notice. images are for illustrative purposes only


artere axis 16

flexible strip light




mounting accessories / installation


bracket

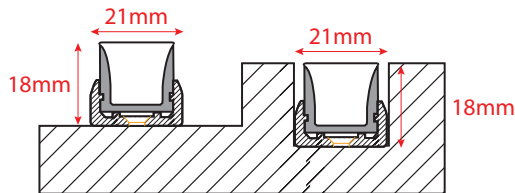



clip

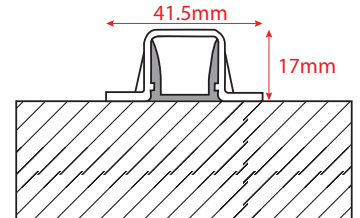



aluminium channel

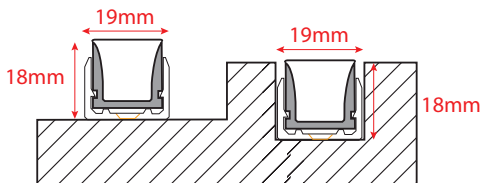

bendable bracket

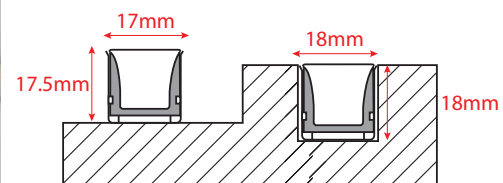


bend & twist diagram

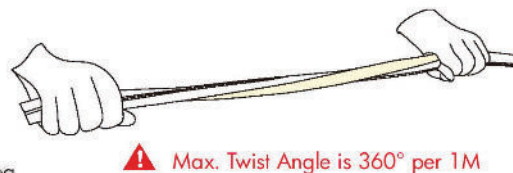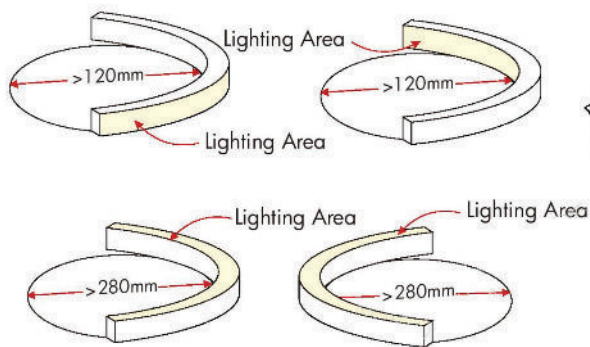

Can be top-bend



Can be side-bend



accessories

Front Cap (Power cable in rear feed)	Front Cap (Power cable in side feed)	Front Cap (Power cable in bottom feed)	Endcap	Glue



+61 (03) 9790 8999
lighting@verbatim.com.au
www.verbatimlighting.com.au



information is subject to change without prior notice. images are for illustrative purposes only