

verde L

exterior spot light




the verde family consists of surface, spike and pole mounted spots with a lockable tilt angle suitable for various external lighting applications. verde encompasses a minimalist sleek design with robust construction including a superior powder coating finish, toughened extra clear flush glass lens and anti syphon valve to prevent condensation build up inside the luminaire.

verde L features a 100mm diameter x 160mm head size with a range of dimming and colour temperatures including RGBW, with optics as narrow as 3 degrees through to 60 degrees, including oval options. the IP65 rating combined with a low glare SMD chip array ensure visual comfort and suitability for even the most exposed outdoor areas. A versatile external spotlight suitable for gardens, facades and general outdoor lighting.




product dimensions

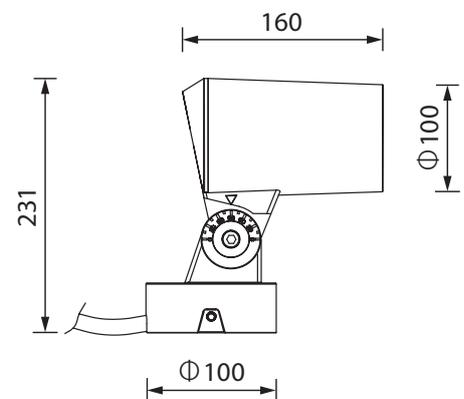


specifications

system wattage:	10W (COB), 4 x 3W, 10W (SMD)
luminaire output:	1040lm, 750lm, 700lm
CCT:	2700K, 3000K, 4000K, RGBW
optics:	3°, 8°, 18°, 24°, 38°, 60°, 10°x60°, 20°x55°
CRI:	90
MacAdam:	<3
control:	non-dim, 1-10V, DALI, DMX
operating voltage:	24V DC
finish:	black or grey, powdercoat finish
housing:	die-cast aluminium
diffuser:	low-glare recessed optics with tempered glass
enclosure protection:	IP65, IK05
operating temp:	25°C
lifetime:	40,000hrs
warranty:	5 years
accessories:	surface mount, spike or pole mount
optional:	snoot

optics

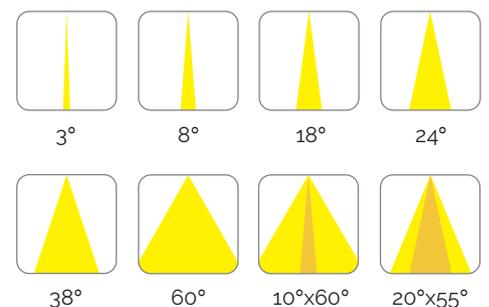

finish



+61 (03) 9790 8999
lighting@verbatim.com.au
www.verbatimlighting.com.au



verde L

exterior spot light



Single-chip COB product code

product group	group designation	driver	wattage	dimmable	optics	cct	fixture colour	mounting	extension pole
FE exterior	VE verde	DC 24v DC	20 20W	Do non-dim DD DALI CS Casambi	18 18° 24 24° 38 38° 60 60°	27 2700K 30 3000K 40 4000K	B black G grey	S surface SP spike P pole	3 300mm 5 500mm 8 800mm 10 1000mm

Multi-chip SMD product code

product group	group designation	driver	wattage	dimmable	optics	cct	fixture colour	mounting	extension pole
FE exterior	VE verde	DC 24v DC	6x3 6x3W	Do non-dim DD DALI CS Casambi	18 18° 24 24° 38 38° 60 60° 1060 10°x60° 2055 20°x55°	27 2700K 30 3000K 40 4000K	B black G grey	S surface SP spike P pole	3 300mm 5 500mm 8 800mm 10 1000mm

Narrow Beam product code

product group	group designation	driver	wattage	dimmable	optics	cct	fixture colour	mounting	extension pole
FE exterior	VE verde	DC 24v DC	3x5 3 x 5W	Do non-dim DD DALI CS Casambi	3 3° 8 8°	27 2700K 30 3000K 40 4000K	B black G grey	S surface SP spike P pole	3 300mm 5 500mm 8 800mm 10 1000mm

RGBW (SMD) product code

product group	group designation	driver	wattage	dimmable	optics	cct	fixture colour	mounting	extension pole
FE exterior	VE verde	DC 24v DC	6x35 6x3,5W	DMX DMX	18 18° 24 24° 38 38° 60 60°	RGB RGBW	B black G grey	S surface SP spike P pole	3 300mm 5 500mm 8 800mm 10 1000mm



+61 (03) 9790 8999
lighting@verbatim.com.au
www.verbatimlighting.com.au




verde L

exterior spot light



size


100mmØ | 20W

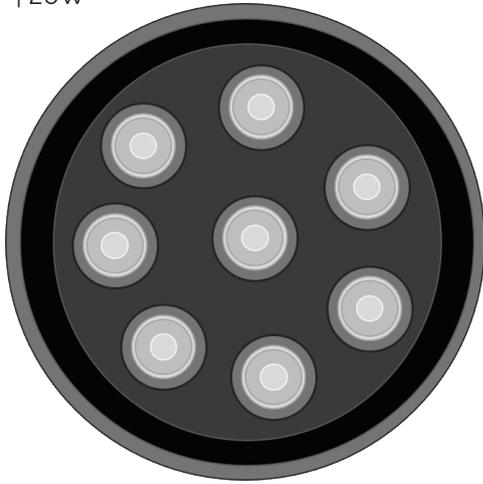


accessories



spike

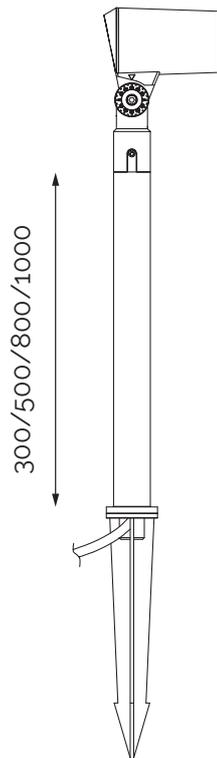

pole

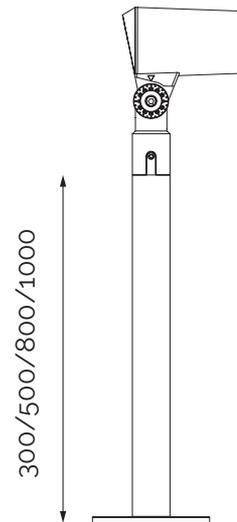

accessory code guide

	POLE HEIGHT				
	No Pole	300mm	500mm	800mm	1000mm
SURFACE	S	-	-	-	-
SPIKE	SP	SP-3	SP-5	SP-8	SP-10
POLE	-	P-3	P-5	P-8	P-10



+61 (03) 9790 8999
 lighting@verbatim.com.au
 www.verbatimlighting.com.au

