

# verde S

exterior spot light




the verde family consists of surface, spike and pole mounted spots with a lockable tilt angle suitable for various external lighting applications. verde encompasses a minimalist sleek design with robust construction including a superior powder coating finish, toughened extra clear flush glass lens and anti syphon valve to prevent condensation build up inside the luminaire.

verde S features a 60mm diameter x 100mm head size with a range of dimming and colour temperatures including RGBW, with optics as narrow as 3 degrees through to 60 degrees, including oval options. the IP65 rating combined with a low glare SMD chip array ensure visual comfort and suitability for even the most exposed outdoor areas. A versatile external spotlight suitable for gardens, facades and general outdoor lighting.




## product dimensions

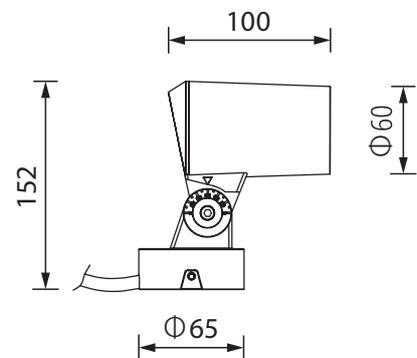


## specifications

system wattage:	6W (COB), 3 x 2W, 5W, 3 x 4W
luminaire output:	450lm, 350lm, 300lm
CCT:	2700K, 3000K, 4000K, RGBW
optics:	3°, 8°, 18°, 24°, 38°, 60°, 10°x60°, 20°x55°
CRI:	90
MacAdam:	<3
control:	non-dim, 1-10V, DALI, DMX
operating voltage:	24V DC
finish:	black or grey, powdercoat finish
housing:	die-cast aluminium
diffuser:	low-glare recessed optics with tempered glass
enclosure protection:	IP65, IK05
operating temp:	25°C
lifetime:	40,000hrs
warranty:	5 years
accessories:	surface mount, spike or pole mount
optional:	snoot

## optics

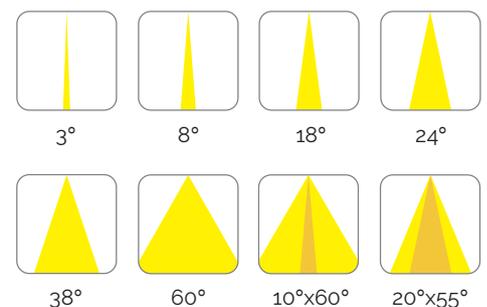

## finish



+61 (03) 9790 8999  
lighting@verbatim.com.au  
www.verbatimlighting.com.au



# verde S

exterior spot light



## Single-chip COB product code

<b>FE</b>	<b>VE</b>	<b>DC</b>	<b>6</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
product group	group designation	driver	wattage	dimmable	optics	cct	fixture colour	mounting	extension pole
FE exterior	VE verde	DC 24v DC	6 6W	Do non-dim DD DALI CS Casambi	18 18° 24 24° 38 38° 60 60°	27 2700K 30 3000K 40 4000K	B black G grey	S surface SP spike P pole	3 300mm 5 500mm 8 800mm 10 1000mm

## Multi-chip SMD product code

<b>FE</b>	<b>VE</b>	<b>DC</b>	<b>3x2</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
product group	group designation	driver	wattage	dimmable	optics	cct	fixture colour	mounting	extension pole
FE exterior	VE verde	DC 24v DC	3x2 3x2W	Do non-dim DD DALI CS Casambi	18 18° 24 24° 38 38° 60 60° 1060 10°x60° 2055 20°x55°	27 2700K 30 3000K 40 4000K	B black G grey	S surface SP spike P pole	3 300mm 5 500mm 8 800mm 10 1000mm

## Narrow Beam product code

<b>FE</b>	<b>VE</b>	<b>DC</b>	<b>5</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
product group	group designation	driver	wattage	dimmable	optics	cct	fixture colour	mounting	extension pole
FE exterior	VE verde	DC 24v DC	5 5W	Do non-dim DD DALI CS Casambi	3 3° 8 8°	27 2700K 30 3000K 40 4000K	B black G grey	S surface SP spike P pole	3 300mm 5 500mm 8 800mm 10 1000mm

## RGBW (SMD) product code

<b>FE</b>	<b>VE</b>	<b>DC</b>	<b>3x4</b>	<b>DMX</b>	<b>X</b>	<b>RGB</b>	<b>X</b>	<b>X</b>	<b>X</b>
product group	group designation	driver	wattage	dimmable	optics	cct	fixture colour	mounting	extension pole
FE exterior	VE verde	DC 24v DC	3x4 3x4W	DMX DMX	18 18° 24 24° 38 38° 60 60°	RGB RGBW	B black G grey	S surface SP spike P pole	3 300mm 5 500mm 8 800mm 10 1000mm



+61 (03) 9790 8999  
lighting@verbatim.com.au  
www.verbatimlighting.com.au




# verde S

exterior spot light



## size


60mmØ | 6W




## accessories



spike

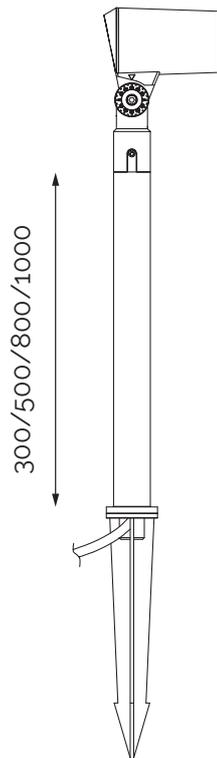

pole

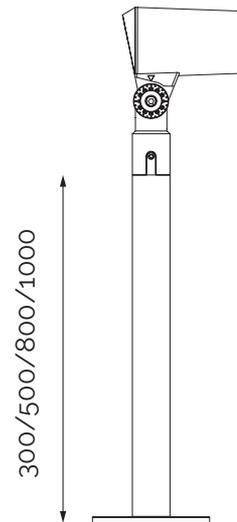

## accessory code guide

	POLE HEIGHT				
	No Pole	300mm	500mm	800mm	1000mm
SURFACE	S	-	-	-	-
SPIKE	SP	SP-3	SP-5	SP-8	SP-10
POLE	-	P-3	P-5	P-8	P-10



+61 (03) 9790 8999  
[lighting@verbatim.com.au](mailto:lighting@verbatim.com.au)  
[www.verbatimlighting.com.au](http://www.verbatimlighting.com.au)

