

# CAMPUS LED BACKLIT PANEL

LEDelements

by  verbatim


The Campus LED Backlit Panel features a seamlessly flicker-free experience, complemented by a tri-colour CCT functionality, allowing you to effortlessly adjust colour temperatures to suit diverse environments. Coupled with a high-quality PS diffuser, this panel guarantees uniform and glare-free light distribution. Includes a robust 5-year warranty that ensures lasting reliability.



- High quality PS diffuser
- Flicker Free
- IP54 (front) & IP50 (back)
- Wattage selectable (16W~35W)
- Tri-colour - 3000K/3500K/4000K
- UGR<19
- MacAdam 3
- 5 year warranty

## APPLICATIONS

Perfectly suited for office spaces, healthcare facilities, educational institutions, and modern residential settings.

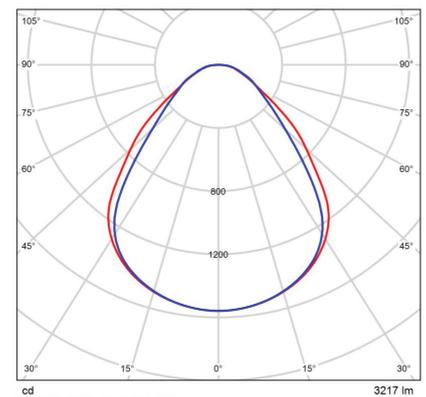

## SPECIFICATIONS

	VPC123DOMWUT	VPC66DOMWUT	VPC63DOMWUT
Size	295 x 1195 x 28mm	595 x 595 x 28mm	295 x 595 x 28mm
Diffuser	PS		
Wattage	16W~35W		
Voltage	220-240Vac 50/60Hz		
Power Factor	>0.9		
Insulation Class	Class II		
Lumens	120lm/W	120lm/W	100lm/W
CRI	>90		
CCT	3000K/3500K/4000K		
Beam Angle	90°		
Lifetime	L80-B10 50,000hrs		
Operating Temperature	-25° ~ +40°C		

[verbatimlighting.com.au](http://verbatimlighting.com.au)

Information is subject to change without prior notice. Images are for illustrative purposes only.

# CAMPUS LED BACKLIT PANEL

LEDelements

by  verbatim

## DIP SWITCH MODE / OUTPUT GUIDE

Campus LED Driver	DIP Switches			Backlit Panel Parameters		
Irated	1	2	3	Wattage (W)	Lumens (lm)	lm/W
400mA	-	-	-	16	1860	118
480mA	ON	-	-	19	2244	120
550mA	-	ON	-	21	2547	120
650mA	ON	ON	-	24	2898	121
700mA	-	-	ON	27	3206	120
800mA	ON	-	ON	30	3524	119
850mA	-	ON	ON	32	3771	119
900mA	ON	ON	ON	34	4046	118

## OPTIONAL MOUNT KITS

Flush Kit, Surface Mount Kit and Suspension Kit options are all available for this fitting. Sold separately.



FLUSH MOUNT KIT



SURFACE MOUNT KIT



SUSPENSION MOUNT KIT

